
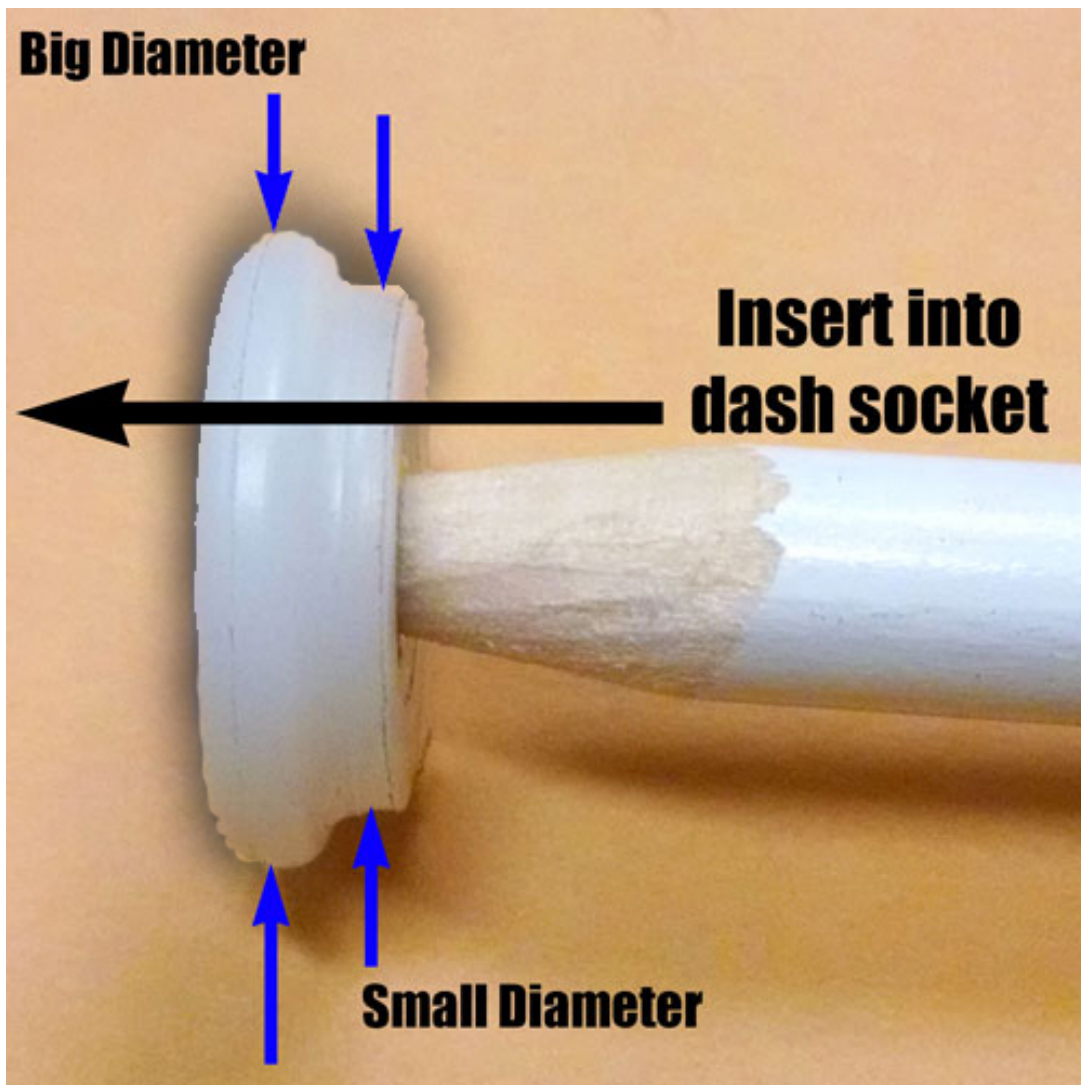


This kit safely and easily modifies your original lighter socket so that most car chargers can be used. This kit has been specifically designed for your Little Bird. If you have any questions or comments, please call our technical help line at 740/622-9700. 

Modifying the dash socket

1. Assemble the button onto the partially sharpened pencil as shown below. Make sure that the large diameter side of the button will be inserted into the socket first. Note: Installation is not possible if the pencil has been completely sharpened. If the pencil has been sharpened, cut off the pointed end of the pencil that sticks out of the back of the button.
2. Double check that the large side of the button is going into the socket first and insert the button into the dash socket. The button will snap securely into the bottom of the socket and you can remove the “tool”.
3. You may wiggle the button into the center of the socket, but we have found it’s not necessary for the function.
4. If you need to remove the button for some reason, it is easiest to disconnect the power and unscrew the socket assembly to remove it from the dash.



15052PO CASCO USB Power Outlet