


## SBR2 Instructions

**Unit is prewound** - If retaining pin has been removed and you need to rewind the unit, turn the drum in the direction of the arrows no more than 8 turns and reinstall the pin.

**Position** - Place retractor on the top of the belt at the center of the length to wind up, with hinge pointing toward rear of seat and tabs down.

**Attaching Belt** - Insert belt under the tabs. Remove pin. If adjustment is necessary, slide retractor back and forth and align squarely across belt.

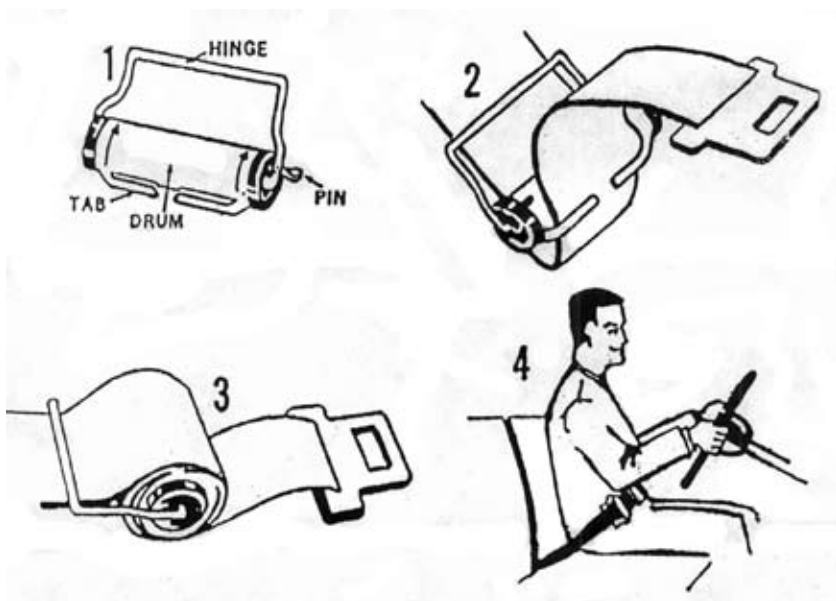

**Warning** - Seat belts must be worn tight! After installing, make sure that no webbing remains on the retractor when belt is in use.

Classic Auto Supply Co.



[www.classicbird.com](http://www.classicbird.com)